

20-3010



Two Ceramic on Brass

FEATURES


- Actuator
- Two PZT Layers
- Competitive pricing
- Special Applications

APPLICATIONS

- Actuation
- Valve Control
- Buzzers and Speakers
- Low Frequency Movement

TECHNICAL SPECIFICATIONS

| | |
|-----------------------------|--------------------|
| Drive Voltage (Typical Max) | 100 Volts p/p |
| Resonant frequency | 2.4 kHz \pm 1kHz |
| Capacitance (pF at 1 kHz) | 75000 pF \pm 30% |
| Resonant resistance | < 250 ohms |
| Outer diameter | 34.2mm \pm .30mm |
| Overall thickness | .50mm \pm .20mm |

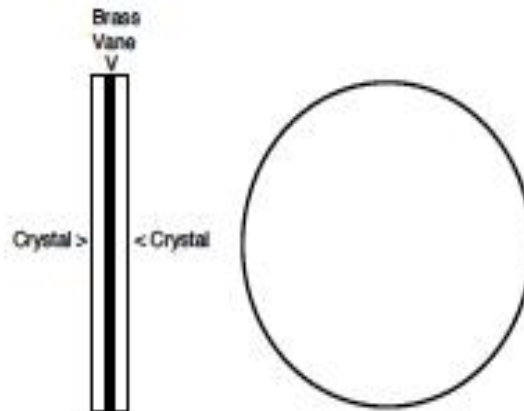

Catalog Number: 20-3010
 Series Bimorph - Center Negative
 D-34.2mm-.50mm-TypeVI Center (-)
 Outer Diameter: 34.20mm \pm .30
 Overall Thickness: .50mm \pm .20
 Brass Vane Thk: .05mm
 Adhesive: Epoxy
 Poling Directing: (+)(-) \square (-)(+)