




APC International, Ltd.

213 Duck Run Road
P.O. Box 180
Mackeyville, PA 17750 USA
Phone: +1.570.726.6961
Fax: +1.570.726.7466

Part Number:	10-1010	Description:	25T - 16AW Air Transducer
---------------------	----------------	---------------------	----------------------------------

Visual Description:	Aluminum Housing with Mesh Face	Transducer Type:	Transmitter
Operating Frequency	25 kHz	Ohms @ Resonant Frequency	** < 1800
Capacitance @ 1Khz	1950 +/- 30 %	Max Input Voltage	20 Volts RMS.
-6 dB Bandwidth	** 4.0 kHz	Resonant Frequency	25 kHz +/- 1
Sound Pressure Level	>= 112 dB	Directivity (-6dB)	** 70 Degs
Operating Temperature	-20 C to 70 C	Approx. Operating Distance	.2 to 6 Meters
Storage Temperature	** -20 C to 70 C	Min. Life Time (normal cond.)	10,000 Hours
Diameter	16.1 mm +/- .3	Height	12.0 mm +/- .4
Pin Diameter	1.0 mm +/- .1	Pin Spacing	10.0 mm +/- .5
Pin Length	9.5 mm +/- 1.0		

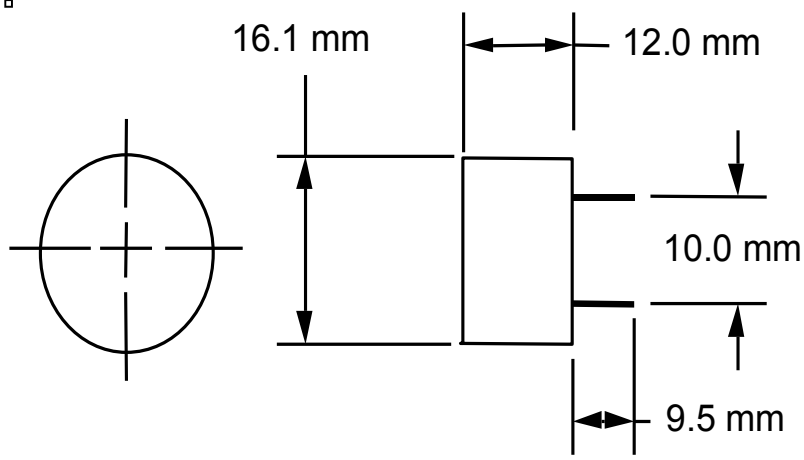

Not to Scale

Note: ** Typical .